

**Product Datasheet model uvex super OTG 9169 080**

**UVEX ARBEITSSCHUTZ GMBH, Würzburger Str. 181-189,  
D-90766 Fürth**

**1. Product Characteristics**

- classic overspecs for prescription spectacle wearers with an innovative temple concept and a flat lens that offers a wide field of vision
- flexible side arms with soft-grip temple ends provide a comfortable, secure fit without pressure
- nose bridge designed for all-day comfort
- robust polycarbonate lens with uvex's proven supravision coating technology – extremely scratch-resistant lens on both sides
- UV400 – 100 % protection against dangerous UV radiation up to 400 nm
- metal-free


**2. Technical Details Body****Front piece**

Material	PA
Colour	black

**Temple**

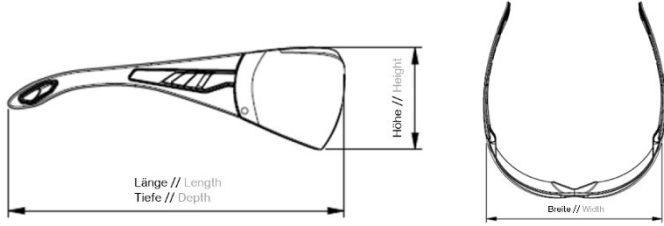
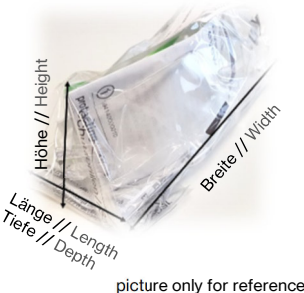
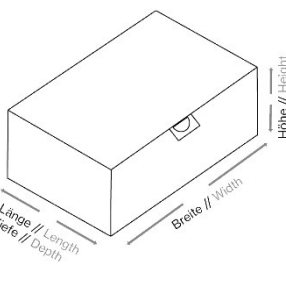
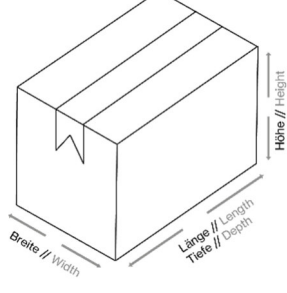
Material	PA/TPE
Colour	black, light grey

<b>Marking</b>	
Manufacturer 's ID code	W
Applicable EN norm	166
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Conformity symbol	CE

<b>3. Technical Details Lens</b>	
Material	PC
Thickness	2.1 mm at PD
Coating	uvex supravision sapphire
Colour	clear
UV protection	UV400
<b>Marking according to EN</b>	
Filter	2C-1.2 (EN 170)
Manufacturer 's ID code	W
Optical class	1
Impact resistance	F (45 m/s)
Resistance to high speed particles at extremes of temperature	T
Scratch resistance	K
Conformity symbol	CE
Factory symbol	

## 4. Logistical Information

### Product

Weight	37g		
Dimensions (L x W x B) in approx. mm	 <p style="text-align: right;">picture only for reference</p>		
	80 x 153 x 58		
	<b>Packing unit 1</b>	<b>Packing unit 2</b>	<b>Packing unit 3</b>
EAN Code	4031101419107		
Quantity in pcs.	1	8	160
Dimensions (L x W x H) in approx. mm	 <p style="text-align: center;">picture only for reference</p>		
	80 x 155 x 54	185 x 290 x 97	600 x 400 x 400
Net weight in approx. g	37	304	5,920
Gross weight in approx. g	51	510	11,120
Country of Origin	Germany		

## 5. Miscellaneous

Standards	EN 166 + EN 170
PPE Category	Category II