
Jull Stage Real-time live cell imaging system

See the whole story, Do not miss a moment of your cells.





See what happened inside an incubator with JuLI™ Stage

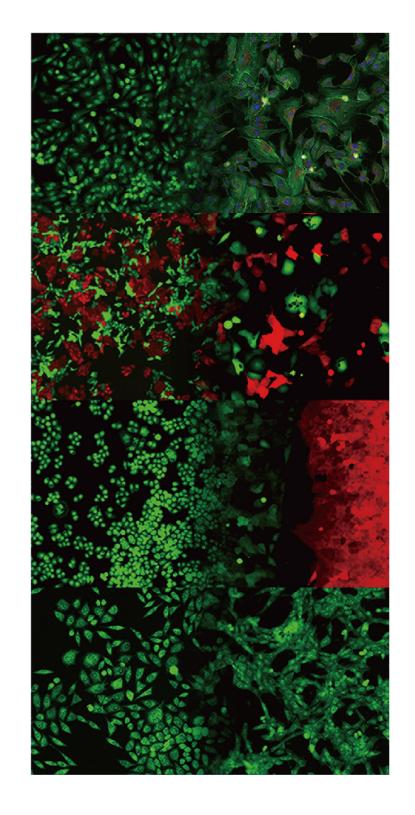


"You can do experiments without any limitation inside your incubator."


- Compact and compatible with a standard CO2 incubator
- Fully automated X-Y-Z stage
- Multi-channel fluorescence imaging
- Easy & powerful software
- Take and analyze images in real time




What you can do with Jull Stage









Apoptosis




Cellular localization




Neurite growth



Cytotoxicity




Scratch assay




Fluorescent cell counting



Proliferation




Transfection efficiency




iPS cell line




Embryonic morphology



Reporter gene



Chemotaxis



Oocyte monitoring



Tissue observation (auto-stitched images)

BASIC SOFTWARE

CHRCell History Recorder

JuLI™ Stage, the new standard of CHR (Cell History Recorder) is designed to get time-lapse images.


- Observe cells in real time and record a cell history from the beginning until the end
- Revert to the time point you desire
- Save time with a fully automatic time-lapse imaging function



- Well plates (6 to 384 wells)
- Slides
- · Petri dishes & flasks


Compatible with various brand well plates with the with the auto adjustment function

01 Multi-Position

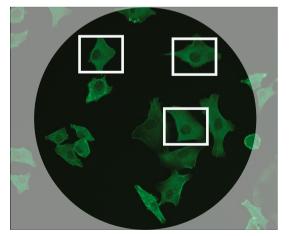


Take any number of images of any positions of a well

02 Stitching options

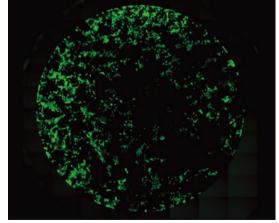

Easy to acquire a whole well stitching image with the stitching function

03 Focus options

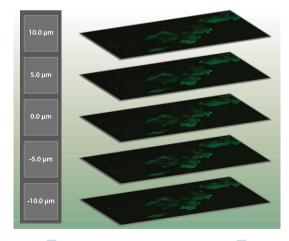

Acquire high-quality images from the Z-stack focus option

EDIT Image Edit

JuLI™ EDIT is designed to import, verify and re-edit project data taken from JuLI™ Stage.


- Edit images in projects
- · Make movies
- Review data on your personal PC

01 Image Editor



[**Bright field**] Improve image quality with background correction **Image.** Auto Adjust

[**Fluorescence field**] Improve image quality with the auto adjust function 02 Movie Maker




Make various types of movie

STAT Image Statistics

JuLI™ STAT is designed to import, verify and analyze project data taken from JuLI™ Stage.


- Get result data from projects
- · Make graphs using result data

1 Attached Cell Counting



Fluorescent cell counting in real time

Quantitative
Results



Analyze results in various forms


03 Plate Editor

All	01	02	03	04	05	06	07	08	09	10	11	12
۸	CMP 100.80 µM			SSP 100.00 pM			CDDP 100.00 µM					
	HeLa (1) 2K cell / well			AS49 (1) 2K cell / well			293T (1) 2K cell / well					
8	CMP 50.00 µM			SSP 50.03 µM			CDDP \$0.00 µM					
	HeLa (1) 2K cell / well			A549 (1) 2K cell / well			293T (1) 2K cell / well					
с	CMP 25.00 µM			55P 25.00 pM				CDDP 25:00 µM				
	HeLa (1) 2K cell / well			A549 (1) 2K cell / well				293T (1) 2K cell / well				
D	CMP 12.50 µM			SSP 12.50 µM			CDOP 12:50 µM					
	HeLa (1) 2K cell / well			A549 (1) 2K cell / well			293T (1) 2K cell / well					
Е	CMP 6.25 pN			55P 6.25 µM			CDDP 6.25 µM					
	HeLa (1) 2K cell / well			A549 (1) 2K cell / well			293T (1) 2K cell / well					
F	CMP 3.13 µM			88P 3.13 µM			CDDP 3.13 µM					
	HeLa (1) 2K cell / well			A549 (i) 2K cell / well			293T (1) 2K cell / well					
G	CMP 1.56 µM			SSP 1.56 µM			CDOP 1.56 uM					
	HeLa (1) 2K cell / well			AS49 (1) 2X cell / well			293T (1) 2K cell / well					
н	DMSD Control 1.00 %			DMSO Control 1:00 %				DMSO Centrel 1.00 %				
	Heta (1) 2K cell / well			A549 (1) 2K cell / well				293T (1) 2X cell / well				

Design your experimental workflow

SCRATCH STAT Scratcher easily creates a uniform scratch line for 96 wells. The Scratch STAT software analyzes scratches in real time.




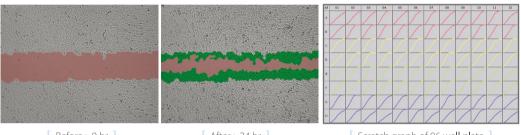



Before: 0 hr] After: 24 hr Scratch graph of 96 well plate

SPHEROID STAT [

The Spheroid STAT software provides various analysis functions of up to 96 spheroids in real time.

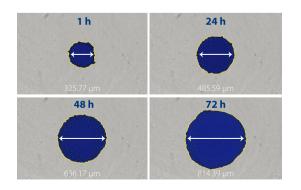

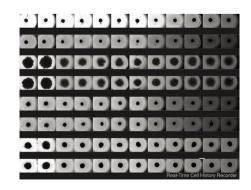

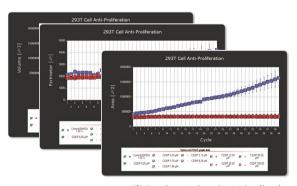

* For the single spheroid cell only

INFORMATION

Specifications

Items	Specification			
Light source	Blue, Green, UV LED (Intensity adjustable)			
Objective lens	4X, 10X, 20X, + Digital zoom Inter-changeable objective lens			
Fluorescence	3 fluorescences DAPI: Excitation 378/5,2, Emission 447/60 GFP: Excitation 466/40, Emission 525/50 RFP: Excitation 543/22, Emission 580LP			
Camera	High-sensitivity monochrome CCD (Sony sensor 2/3") 1,936 x 1,456 pixels (2.8 M), 53 FPS, 14 bit			
Stage	Automated, motorized, X-Y-Z stage Ex-changeable vessel holders(optional)			
Exported formats	Image : JPEG, TIFF, BMP, PNG Video : AVI Raw data : CSV			
PC	Desktop computer, Desktop monitor 24-in. LCD CPU: Intel i5, 9 gerneration or over spec. OS: Windows® 10 Pro 64 bit RAM: 16 GB Hard drive: 2 TB Network: Gigabit Ethernet, WiFi *PC specifications may change without notice.			
Operating power	100 - 240 V, 1.5 A, 50/60 Hz			
Electronic input	12 VDC, 2.0 A			
Operating environment	5 - 40 °C, 20 - 95%			
Dimensions	429(W) X 310(D) X 324(H) mm			
Weight	18.5 kg / 41 lb			

Ordering Information

Cat. No.	Product	Description				
JS1000S	JuLl™ Stage, Starter Pack	JuLI [™] Stage basic set (JS1000), Desktop computer (JP0200), 3 Objective lenses (4X, 10X & 20X)				
JS1000	JuLI" Stage, Real-Time Live Cell Imaging System	Main device, power supply, control box				
JP0100	Desktop Computer	CPU: Intel i5, 9 gerneration or over spec. OS: Windows® 10 Pro 64 bit RAM: 16 GB Hard drive: 2 TB Network: Gigabit Ethernet				
JMO100	Desktop Monitor	24" Fu ll HD (1920 x 1080) monitor				
JP0150	External Hard Disk Drive (Optional)	Total 8 TB (4 TB x 2 ea)				
JO0004	Objective Lens (4X)	Magnification : 4X, NA : 0.16				
JO0010	Objective Lens (10X)	Magnification : 10X, NA : 0.3				
JO0020	Objective Lens (20X)	Magnification: 20 X, NA: 0.45				
JVH001	Vessel Holder (Optional)	Micro Slide (26 x 76 mm)				
JVH002	Vessel Holder (Optional)	Petri Dish (35 mm)				
JVH003	Vessel Holder (Optional)	Petri Dish (60 mm)				
JVH004	Vessel Holder (Optional)	Petri Dish (100 mm)				
JVH005	Vessel Holder (Optional)	T-Flask (25 & 75 cm²)				
JOS1000	JuLI Stage Software (CHR)	CHR (Cell History Recorder)				
JSCT100	JuLI Analysis Software (Scratch)	JuLI Scratch STAT JuLI Scratcher				
JSPT100	JuLI Analysis Software (Spheroid)	JuLI Spheroid STAT				

JuLI Stage Real-time live cell imaging system

NanoEntek, Inc.

Head Office

12F, 5, Digital-ro 26-gil, Guro-gu, Seoul, 08389, Korea Tel:+82-2-6220-7940/Fax:+82-2-6220-7999

NanoEntek America, Inc.

220 Bear Hill Road, Suite 102, Waltham, MA 02451, USA USA Tel: +1-781-472-2558

website

www.nanoentek.com

e-mail

sales@nanoentek.com

blog

www.blog-nanoentek.com

