



Chemical protection

ALTO 405 ACTIVATED

Frequent contact | intermittent wear



CHEMICAL PROTECTION
TYPE B



2110X



TYPE B
KMT



VIRUS



EN 421

CAT.CATEGORY 3



0334

DEXTERITY

EN 420:
5/5

Liquidproof glove, embedding antimicrobial Pylote's technology, that limits cross contamination by viruses & bacteria

SPECIFIC ADVANTAGES



Protective Shield

- Surface protection : destruction of 99% viruses (ISO 21702:2019) & 99.99% bacteria (JIS Z 2801 standard)
- User protection : hands protected against viruses & common aggressive chemicals



Comfort

- Tactile sensitivity, due to the gloves reduced thickness
- good grip due to the non-slip embossing
- Cotton flocking provides added Comfort and perspiration absorption



Durability

- the antimicrobial action lasts for the expected lifetime of the glove



Additional benefits

- the biocidal active components are produced by green chemistry
- Optimised individual packaging format so as to limit plastic waste

INDUSTRIES

- Local Authorities (Cleaning)
- Health
- Manufacturing
- Horeca

APPLICATIONS

- Common cleaning tasks in hospitals and clinics
- Common cleaning tasks in public spaces
- Handling household detergents
- Handling aggressive chemical products
- Industrial cleaning, maintenance
- Common cleaning tasks in public establishments (hotels, restaurants, catering)



Chemical protection

ALTO 405 ACTIVATED

Frequent contact | intermittent wear


LEGENDS

EN388

MECHANICAL HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

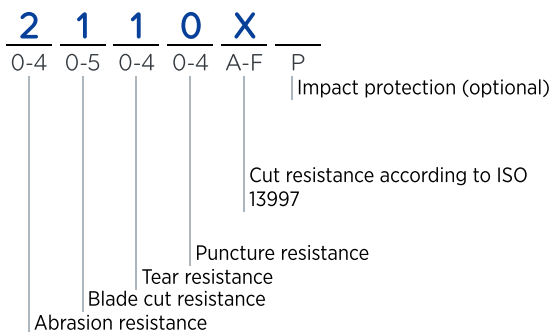

EN ISO 374-1

CHEMICAL RISKS



K: Sodium hydroxide 40%
M: Nitric acid 65%
T: Formaldehyde 37%

TYPE B

EN 421

RADIOACTIVE CONTAMINATION



EN ISO 374-5

MICRO-ORGANISMS



Protection against bacteria, fungi and virus

VIRUS

PRODUCT DETAILS

Interior finish	Flocked
Exterior finish	Embossed texture
Material	Polychloroprene and natural latex
Cuff characteristic	Straight cuff
Colour.s	Blue Yellow
Length (cm)	33
Thickness (mm)	0.7
European sizes	6 7 8 9 10
Surface resistance according to EN1149-1 (Value in palm area at 25% relative humidity)	7.8E+12 Ω
Vertical resistance according to EN1149-2 (Value in palm area at 25% relative humidity)	4.2E+12 Ω

LOGISTIC DETAILS

Packaging	1 pair/bag 10 pairs/bag 100 pairs/carton
-----------	--

LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/05/18/0950
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE
- Quality assurance certificat: 0334 - Asqual 14 rue des Reculettes -75013 Paris - France