

## **ID-Nr. 30427-001** Model UB90.060.110.2S



Dimensions	
Width (external)	1102.00 mm
Depth (external)	574.00 mm
Height (external)	600.00 mm
Width (internal)	979.00 mm
Depth (internal)	452.00 mm
Height (internal)	502.00 mm

Height (internal)	502.00 mm
The available internal dimensions can vary depending on the interior	or equipment package.
Weight / Load	
Weight without interior equipment	180 kg
Distributed load	277.00 kg/m²
Maximum load	300 kg
Ventilation	
Extraction air	50 DN
Minimum exhaust air quantity 10 times	2 m³/h
Differential pressure (10 times air change)	1 Pa
Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	plain
<b>General Information</b>	
Number of drawers	2
Capacity of drawer	1 1.50 litres
Capacity of drawer 2	11.50 litres

94032080

Customs tariff number




safety storage under bench cabinet UB-S-90 Model UB90.060.110.2S, light grey (RAL 7035)


Safe and approved storage of flammable hazardous substances in working areas

## **Function / construction:**

- Robust construction and longevity: body made of powdercoated sheet steel
- **Safe:** drawers fitted with earthing wire incl. clamp as standard, seal welded sump, drawers are self-closing in the event of fire
- No unauthorised use: drawers lockable with cylinder lock and locking state indicator (red/green)
- Mobile: castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system

Front view Side view



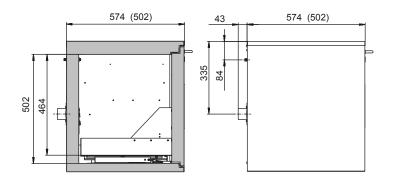

Top view

