

ID-Nr. 30358-001 Model K90.060.110.050.UB.ST



Dimensions	
Width (external)	1102.00 mm
Depth (internal)	381.00 mm
Height (external)	601.00 mm
Width (internal)	470.00 mm
Depth (external)	502.00 mm
Height (internal)	502.00 mm
The available internal dimensions can vary depending on the interior e	equipment package.
Weight / Load	
Weight without interior equipment	155 kg
Distributed load	275.00 kg/m²
Maximum load	300 kg
Ventilation	
Extraction air	50 DN
Minimum exhaust air quantity 10 times	2 m³/h
Differential pressure (10 times air change)	1 Pa
Colouring / Surface finish	
Body colour code	RAL 7035
Body colour	light grey
Body surface finish	plain
Door / Drawer colour code	RAL 7035
Door / Drawer colour	light grey
Door / Drawer surface finish	plain
General Information	
Left compartment	Compartment for the stor- age of flammable liquids
Right compartment	Compartment for the storage of aggressive, non flammable hazardous materials



Combi safety storage cabinet K-UB-90 Model K90.060.110.050.UB.ST, light grey (RAL 7035)

Safe and approved storage of aggressive and flammable hazardous substances in working areas

Function / construction:

- Robust construction and longevity: body made of powdercoated sheet steel
- User-friendly and safe: door and drawer remain open in any position, interior of the cabinet completely visible access to all containers, 93° opening of the wing door
- Safe: drawer fitted with earthing wire incl. clamp as standard, seal welded sump, drawers are self-closing in the event of fire
- **No unauthorised use:** door and drawer lockable with cylinder lock and locking state indicator (red/green)
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system, extraction of both compartments through one ventilation connection


Depth with open doors

Customs tariff number


964 mm

94032080

Front view

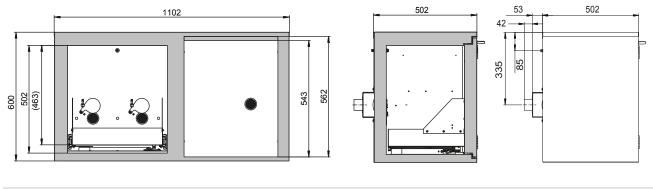

Top view

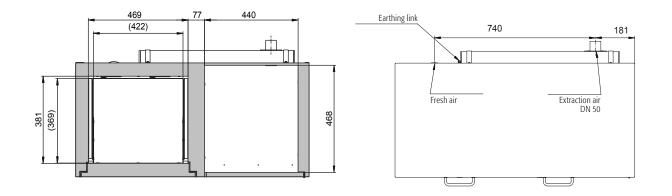

For further information please visit www.asecos.com